

An Overview of the Impact of Water Pollution on Life, Future Aspects, and Solution

***Mali Ram Meena**

ABSTRACT

Natural resources are abundant on earth, which is a blessing for humanity trying to live. One such item that is absolutely necessary for existence is water. A growing problem throughout the whole planet is water contamination. It becomes polluted from a variety of causes, including urbanisation, sewage, industrialisation, and overpopulation. In recent years, it has become necessary to regulate and manage water contamination in order to ensure that both current and future generations have access to clean water. The treatment of polluted water may be done in a variety of ways, including coagulation, precipitation, filtration, ion exchange, photo catalysis, etc. The enhanced oxidation method known as photo-catalysis is specifically designed to remove organic compounds from wastewater. Thus, several photocatalysts, especially those with oxide as a second component and Pb metal atoms as a first component, are addressed here.

Keywords: Water pollution, BOD, and the process of dilution

INTRODUCTION

Water is a crucial natural resource for all living things worldwide. An adjustment of the physical, substance, or natural properties of water that could adversely affect individuals or sea-going life is alluded to as "water contamination."

Almost 80% of the waste water is released once more into the environment, most of it untreated, which contaminates rivers, lakes, and seas.

According to Varjani et al., the recent fast industrialisation has increased the amount of toxins released into the environment. Waste disposal into waterways results in significant water contamination. There are several ways to measure water contamination, including BOD, COD, DO, pH, etc. Water pollution: origins, impacts, control, and management was the topic of Owa's study. He explained how elements like industrialisation and agricultural activities have harmed the quality of water and led to water pollution. The causes, consequences, controls, and management of water contamination were also covered. High population density, sewage releases, industrialization, horticultural waste, pesticides, herbicides, composts, creature squander, lacking administration, deforestation, oil slicks, and so forth are only a few of the causes of water pollution.

So, the aforementioned criteria are taken into account in this assessment. The numerous traditional

An Overview of the Impact of Water Pollution on Life, Future Aspects, and Solutions

Mali Ram Meena

and cutting-edge ways that may assist remove pollutants from the environment, such as water, air, soil, etc., and make the world pollution-free, which is urgently needed, are discussed one by one.

METHOD AND MATERIALS

Factors that cause pollution

High density of people: The majority of human activities typically cause water contamination, and population density makes it worse. Consumption rises along with population growth, causing a shortage of drinkable water. As a result of different human activities, the environment and therefore natural resources, particularly water, get polluted with undesirable pollutants. Eguabar cited urban overpopulation as the cause of the growing water contamination. The connection between the pace of populace development in a watershed locale and its effect on the water quality qualities of a stream biological system was inspected by Chamara et al. They determined the ideal population thickness for a watershed to keep the water quality at a reasonable level. They chose to look at and break down the Kelani Stream in Sri Lanka. The populace in the waterway's bowls was found to have the best relationship coefficients, which were 0.7, 0.69, and 0.69 ($p < 0.01$) for biochemical oxygen interest (Body), disintegrated oxygen (DO), and absolute coliform (TC). They came to the conclusion that the human density needed to be under 2375 to maintain bathing and drinking water quality in the watershed and under 2672 to maintain the health of fish and other aquatic species.

Leaking sewage: Water may sometimes get contaminated owing to sewage leaks, which can happen as a result of accidents, subpar workmanship, or natural disasters. Different areas' urbanisation need adequate sewage control. Use of diverse manmade materials resulted from this. These materials often leak as a result of manufacturing flaws. Municipal sewage is the main cause of the Ganga river's dire situation when it comes to water contamination, according to Dwivedi and colleagues. Nearly 29 sizable cities with a combined population of more than one million people are included in the Ganga. This whole population pollutes the river by discharging sewage effluents into it, which causes the poor water quality. The central pollution control board reported in 2009 that there were more microbes in the drinking and bathing water.

Industrialization: A new age of industry began with the rise in population, urbanisation, and the demand for development, and it progressively became necessary. After then, the waste began to enter the ecosystem. According to Rajput et al., improperly disposed industrial waste has a negative influence on the area's natural resources. Regular disposal of pesticides, chemicals, used motor oil, and heavy metals contaminates water to a greater degree.

The mercury pollution caused by waste effluents from an Indian thermometer manufacturing was brought to light by Karunasagr. This exploration estimated how much mercury is present in water, silt, and fish tests and contrasted the outcomes with those from Berijam and Kukkal, two additional lakes. Kodai water had 356-465 ng/l of absolute mercury (HgT) and 50 ng/l of methyl mercury. 276-350 mg/kg HgT with around 6% methyl mercury were recognized in Kodai silt. Lower methylation was tracked down in dregs from Berijam and Kukkal, with HgT groupings of 189-226 mg/kg and 85-91 mg/kg, respectively. Rajaram et al. referred to circumstances like Tiruppur and

An Overview of the Impact of Water Pollution on Life, Future Aspects, and Solutions

Mali Ram Meena


Plachimada and arrived at the resolution that the response is exact release norms, and neighborhood networks should assist with safeguarding their assets.

Waste from agriculture: Since the beginning of life on Earth, agriculture and cultivating crops have been fundamental activities for all living things. The need for greenery and crops expanded as population expansion got underway. As a result, manures, pesticides, and other synthetic techniques were compelled to be used, and their overuse resulted in the discharge of these substances into water and other natural resources.

According to Agamuthu's research, agricultural waste is the leftovers from agricultural goods including crops, livestock, fruits, and vegetables that are too expensive to prepare for use. As a result, getting rid of these leftovers from environmental resources is harder. The sort of agricultural operations that are conducted determine the agricultural waste. According to Dien et al., one of the factors contributing to water pollution is the disposal of empty pesticide bottles and packages that are dumped into bodies of water. According to estimates from the Plant Protection Department, these packing materials still contain 1.8% of pollutants. The environmental harm brought on by agricultural burning and potential uses for crop residue were investigated by Kumar et al.

They noted that while burning straw, carbon, nitrogen, and sulphur are totally burned and released into the environment. When combined with other airborne pollutants like methane, nitrogen oxide, and ammonia, this may result in severe atmospheric pollution. They came to the conclusion that burning agricultural waste destroys the nutrients already present in the soil, making it difficult to grow the following crop (Figure 1).

Figure 1. Causes of water pollution.

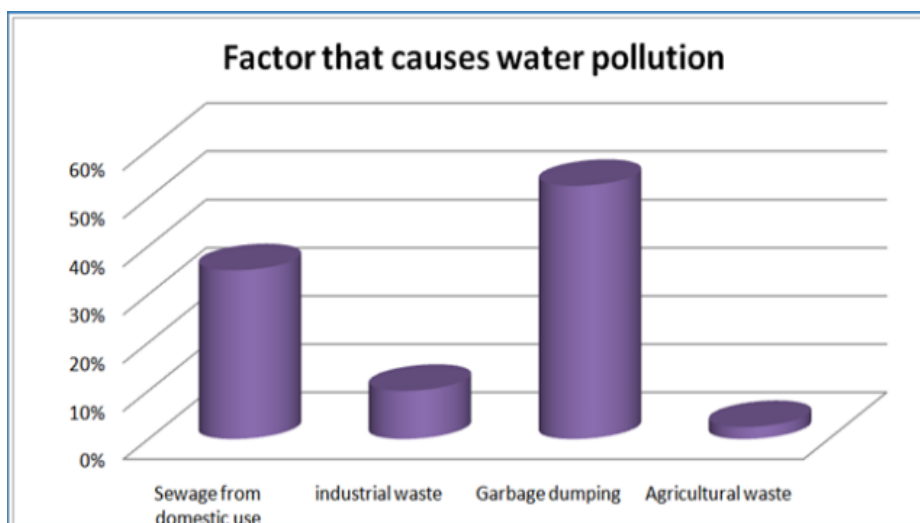


An Overview of the Impact of Water Pollution on Life, Future Aspects, and Solutions

Mali Ram Meena

Effect of water pollution: Using polluted water has a number of negative consequences on human, plant, and animal health. Polluted water is unsustainable for aquatic life. Additionally, it is still useless for residential usage (Figure 2). According to Haldar et al., the Turag River area's local populations are experiencing a variety of health issues, which may be caused by the river's filthy water. The research presented evidence that use of contaminated water from Bangladesh's Turag River leads to health issues such as diarrhoea, dysentery, skin conditions, respiratory illnesses, anaemia, yellow fever, cholera, dengue, and pregnancy complications, among others.

Figure 2. Effects of water pollution.

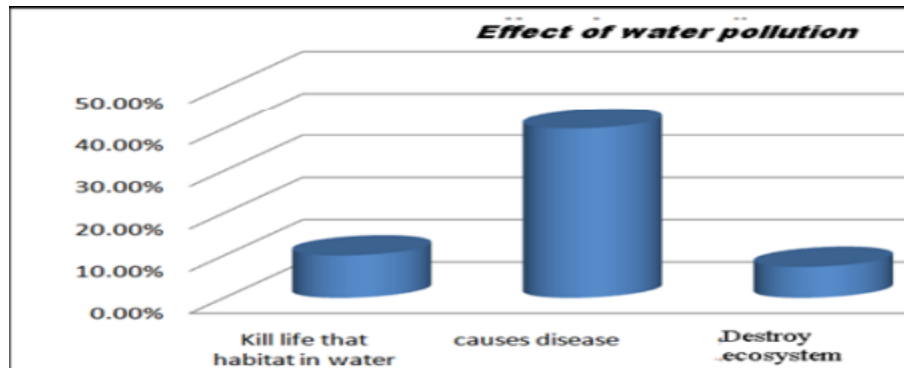

Thus, it is urgently necessary to purify the water, and several procedures are now being used to accomplish so.

It is necessary to remove these contaminating elements from the water bodies after classifying the contaminants that are present in the water. For this, it is preferable to choose treatment techniques that are simple to use, inexpensive, easy to handle, highly effective, and shouldn't release secondary pollutants.

There are several traditional techniques for cleaning contaminants out of aquatic bodies.

Regularly, certain dissolved, suspended, or coagulated pollutants are removed from water using traditional procedures, which are still in use today. Such techniques include:

- Flocculation or coagulation
- The precipitation
- The filtering
- The absorptio
- Solvent removal
- Membrane dissociation
- Exchange of ions For example, photocatalysis

An Overview of the Impact of Water Pollution on Life, Future Aspects, and Solutions

Mali Ram Meena

In the research, an effort is made to analyse several techniques for removing contaminants from water, particularly those that are coloured, or dyes, which are often discharged into water by textile sector businesses and cause pollution.

One of the factors contributing to pollution is the presence of suspended colloidal particles in the majority of water bodies.

Bratby suggested a number of benefits of treating such water sources using coagulation. It was claimed that the technique is preferable since it is affordable, quick to treat pollutants, and effective for those that are intractable. The technique was also picked because it may be used with a variety of chemicals to remediate dirty water. Additionally, no additional substance is added to the water throughout the procedure.

Methylene blue and methyl orange dyes were found to have degraded utilising the coagulation technique in laterite soil with a silica component, according to Yen-Yie et al. The decolorizing system was interrupted by charge balance, electrical twofold layer pressure, and clearing flocculation. This examination portrayed the breakdown of methylene blue and methyl orange into more modest hydrocarbon atoms as well as the development of silsesquioxane.

According to Moghaddam et al research, 's dye degradation is accelerated by a drop in pH and does not return as sludge production rises. The researchers came to the conclusion that recycling ferric chloride sludge as a cheap material in the coagulation/flocculation process in wastewater treatment facilities may have certain benefits, including very effective acid red 119 dye removal and financial savings on treatment plant running expenses.

Precipitation is an exceptionally direct strategy wherein an immersed arrangement of any substance is blessed to receive produce a strong. Silva and associates utilized the oxidant Mn_3O_4 to concentrate on the methylene blue debasement. They involved air as an oxidant to co-accelerate discrete Mn_3O_4 particles and Mn_3O_4/Fe_3O_4 nanocomposites, which were delivered in the absence and presence of recently created magnetite nanoparticles, separately. They utilized this nanocomposite to catalyze the N-demethylation of methylene blue, which prompts the development of thionine as the final product of the oxidative decolonization of methylene blue.

According to Chen et al., the precipitation approach was regarded as a less complicated, more affordable way to significantly lower water COD. They came to the conclusion that under visible light, the constructed photo-catalytic membrane destroyed dye molecules and separated oilwater emulsion. This membrane demonstrated remarkable antifouling and recyclable properties. The deterioration of acid blue 80 was proposed by Zhu et al. Alkaline white mud, with a 95% degrading efficiency, was used to accomplish this.

Filtration, according to Chakraborty et al., is a quick and effective technique. There are numerous different filtering methods, including microfiltration, ultrafiltration, and nanofiltration. According to Cheng et al., decreased graphene oxide- TiO_2 nanomaterial may be faked using simple vacuum filtering, which destroys the dye. Large surface area, flexible structure, charge carrier mobility, and high conductivity were all characteristics of this combination.

In microfiltration, germs and suspended particles are removed from process liquid by passing it

An Overview of the Impact of Water Pollution on Life, Future Aspects, and Solutions

Mali Ram Meena

through a specific membrane with tiny pores. This method of concentrating, purifying, or separating macromolecules, colloids, and suspended particles from solution uses pressure to drive the separation process. Also known as semipermeable membrane filtration, ultrafiltration is a kind of membrane filtration in which factors like pressure or concentration gradients cause a separation across the membrane. It works well to lower the water's silt density index and remove particles that might clog reverse osmosis membranes. It is comparable to reverse osmosis. Another pressure-driven membrane filtering method is nanofiltration. This method is often used to remove organic debris, colour, odour, small amounts of disinfectants, and trace amounts of herbicides from vast bodies of water.


Pollutants, mostly dyes, are present in textile industry effluents. The adsorption technique may be used to remediate such contaminants. Biodegradation may be used to get rid of water-soluble colour, according to Henze et al. Active microorganisms with two activities are used for this purpose: Adsorption on the substance's surface

The degradation of dyes by these microorganisms' generated enzyme.

Pirok, et al. mentioned a several benefits of this procedure, including how well-liked it is by the general people, how many species are accessible, how cheap it is, etc.

Under the solvent extraction process, compounds may be extracted from water based on how well they are soluble in two distinct solvents. This is accomplished by using two solvents, one polar and the other non-polar. Eosin and carminic acid dyes may be removed from contaminated water using DMSO, acetonitrile (a non-polar solvent), and water (a polar solvent), according to Crini. Reverse micelles are a novel method of liquid/liquid extraction that was proposed by Pandit et al., allowing for solvent recovery and dye reuse. They indicated that when surfactant concentration rises, so does the ratio of solvent to aqueous phase volume needed to remove colour. They came to the conclusion that amyl alcohol separates from the aqueous phase of the solvent dispersion more quickly than benzyl alcohol and methyl benzoate (Figure 3).

Figure 3. Solvent extraction apparatus.

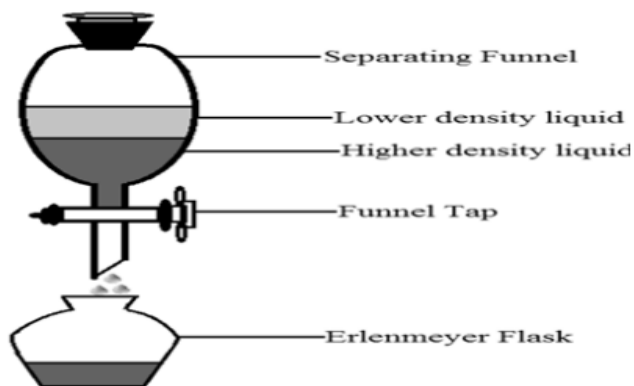

In order to recycle and reuse the treated wastewater, membrane separation is a valuable and well-known approach. Here, water is filtered using membranes made of various materials and sieve sizes. Sieve size may be measured in microns. According to Choi et al., this method is effective in separating parts with different particle sizes and molecular masses. It might be said that some membranes are selective towards certain materials and hence permit the passage of certain materials. Santos et al. investigated the in situ crystallisation of Cr^{3+} that was embedded on a geopolymer membrane. To treat dye waste water, this was used as a hybrid photo catalyst. In order to understand the catalytic wet peroxide oxidation of Rhodamine G dye over the Fe-ZSM-5, Prihodko, et al. evaluated the impact of surface acidity, nature, and dispersion of iron species, regulated by the catalyst manufacturing process.

Unwanted ions are swapped out for other, non-contaminating ions using the ion exchange technique, one of the pollutants removal techniques. In a dual cell reactor, Ansari et al. investigated the efficacy of polyaniline-Cl, polyaniline- ClO_4 , and polyaniline- SO_4^{2-} ClO on nitrate removal. Electrically switched ion-exchange technology was used as a safety precaution. Vithal et al. used an easy acid-free ion exchange procedure in an aqueous solution at ambient temperature to generate nanosized Cu^{2+} and Ag^+ doped $\text{Na}_2\text{Ti}_3\text{O}_7$. The degradation of blue dye in waste water effluent was then accomplished using this. They also looked at the Methylene Blue (MB) dye's photocatalytic oxidation caused by visible light.

In addition to all of these cleaning and purifying techniques, it has been shown that sophisticated oxidation processes have significant promise for removing contaminants. Other advantages include the fact that no more chemicals are added to the environment, the production of a free radical chain reaction that continues on its own initiative without the need for further effort, etc. Photo catalysis is the process of accelerating a reaction in the presence of light and a catalyst. By absorbing light photons, pollutants are transformed into inert compounds. Today, photocatalysis is widely applied in many different industries, including solar cells, hydrogen generation, pollutant degradation, and environmental factor purification. It is regarded as an advanced oxidation process. In order to acquire clean, pollutant-free water for use for various reasons like cleaning, washing, cooling, etc., the removal of coloured contaminants from industrial effluents is thus taken into consideration. Another area that needs investigation is the potability of this treated water. Mohammad et al. suggested using pure Cu_2O , $\text{Cu}_2\text{O}/\text{TiO}_2$, and $\text{Cu}_2\text{O}/\text{ZnO}$ to photodegrade Congo red dye. They provided details of an easy, one-pot solvo-thermal synthesis process that uses these chemicals as reducing and solvent agents.

Floating photo catalyst was investigated by Mohammad et al. as a viable contender for wastewater treatment. The disadvantages of the suspended TiO_2 photocatalysis system may be solved, they further said. Under visible light, TiO_2 and polyvinyl alcohol at a 1:8 ratio degraded the methylene blue colour. Immobilized TiO_2 was employed as a photocatalyst by Grao et al. on stainless steel mesh. They looked at five independent factors: the amount of UV radiation, the number of layers of TiO_2 -coated mesh, the thickness of the coating, the flow velocity of the water, and the starting dye concentration.

An Overview of the Impact of Water Pollution on Life, Future Aspects, and Solutions

Mali Ram Meena


RESULTS AND DISCUSSION

To effectively discolour organic dye pollutants in wastewater, Roonasi created a combination of barium ferrite and activated carbon. Several factors, including temperature, catalyst quantity, radiation intensity, and photocatalyst reusability that influence the discoloration of organic dyes, among others, were taken into account in this research.

It has been shown that a photocatalyst's technique of synthesis has a significant impact on both its activity and how well it reacts with pollutants. Various strategies and procedures have been developed in order to create appropriate photocatalysts for the degradation of organic dyes. Numerous techniques were used for this, including the sol-gel auto combustion process, homogeneous hydrolysis, ultrasonic technology, co-precipitation technique, etc. Some doped materials, such as Mn doped and PVP capped ZnO nanoparticles, Iridium doped ZnO, and 3D flowers made of F-doped titanium dioxide bronze fullerene (F-TiO₂ (B)/fullerene), cobalt doped nanotitania photo catalytic system, were also employed for degradation. P-Rosaline hydrochloride was degraded utilising barium tungstate as a photocatalyst by Nihalani et al.

In order to increase and accelerate the speed and quality with which a photocatalyst reacts with a pollutant, the mechanism of the overall degradation process was also determined. According to research by Mills et al., photoinduced dye degradation is a process that is sped up by the presence of photocatalysts. According to Carp et al., these reactions are triggered by the absorption of photons with energies that are at least as high as the photocatalyst's band gap energy. It was claimed that to sustain catalytic activity, the continual consumption of hydroxyl radicals during photocatalysis required replenishment. For flow rates up to 20,000 cfm (ft³/min), photocatalytic oxidation has been found to be more cost-effective than incineration or bio-filtration for treating a stream with 500 ppm of volatile organic compounds (Figure 4).

Figure 4. Diagrammatic representation of the photo catalytic reaction that is started by a photon acting on a semiconductor

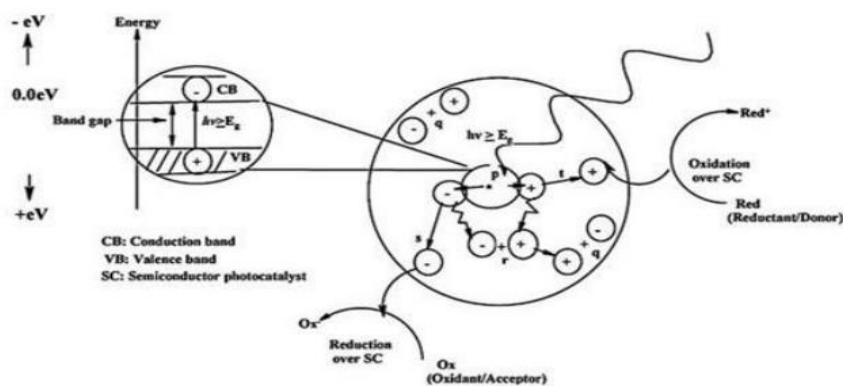

According to Konstantinou et al., when an electron accelerates from a semiconductor's valence band to the conduction band, a hole is created in the valence band. The organic molecule may be oxidised by the photogenerated holes to make R^+ , or they can react with OH or H₂O to oxidise them into OH• radicals. The resultant OH• radical may oxidise the majority of azo dyes to the mineral end products since it is a highly vigorous oxidising agent (standard redox potential +2.8 V).

Liu et al. used bi-doped lead dioxide anodes over an acid medium to study the electro catalytic oxidation of o-nitrophenol (o-NP), m-nitrophenol (m-NP), and p-nitrophenol (p-NP) by cyclic voltammetry and bulk electrolysis.

Reducing and managing water pollution

Through the assessment, it was discovered that all contaminants have the potential to directly or indirectly harm water. Thus, a survey on the management and control of water pollution served as the study's conclusion. There are several strategies that may be used to prevent, regulate, and manage the control measures, launch a project or programme, etc., water pollution.

Alguraja, et al. reported using remote sensing and a GIS strategy to address water pollution in the Indian Tamilnadu region's Tiruchirappali Taluk. They advised using a remote sensing research using IRS-1D LISS 111 satellite images and SRTM data, as well as constructing several thematic layers in the block to demarcate the administrative division of the study region.

Sing and colleagues investigated the causes, impacts, and mitigation of water contamination. They provided a list of every control measure implemented by the government and NGOs. Olmstead, et al. analysed policy tools, empirical data, and water pollution prevention in developing nations. In order to prevent water pollution, they discussed a variety of prescriptive and performance-based regulations, voluntary initiatives, and other policy tools. Manjula and colleagues investigated the legislation governing ground water contamination in India. They discussed the limitations and lack of consensus of the Act of 1974, which was created to address water contamination. The regulation was found to be insufficient to implement certain simple solutions, like as reverse osmosis, etc.

CONCLUSION

We may deduce that around 71% of the earth's surface is covered with water, and that oceans account for 96.5% of that water. The amount of fresh, drinkable water on earth is just 3%. The amount of industrial waste that is discharged into water is over 70%, while home sewage is responsible for 80% of the water contamination. Large-scale water pollution is a result of several human activities. The health of humans and aquatic life are negatively impacted by water pollution. Nowadays, experts are focusing their study on this problem.

As a result, several treatment techniques, including filtering, are created. To fix this problem, use coagulation, ion exchange, precipitation, adsorption, photocatalysis, etc. These techniques aid in the cleansing and purification of water, and the treated water may be used to many industrial, agricultural, and other uses. More processes must be added to the water before it can be utilised for drinking. The finest pollution-removing agents are thought to be photocatalysts, which are utilised to

An Overview of the Impact of Water Pollution on Life, Future Aspects, and Solutions

Mali Ram Meena

destroy contaminants found in water. Electrostatic attraction causes certain dye molecules to adhere to the surface of the photocatalyst, where they are then mineralized by non-selective free radicals. As a result, the target molecule's adsorption on the photocatalyst surface may be seen as a crucial step toward effective photocatalysis and may entirely eliminate the contaminants, leaving clean water left for continued usage.

***Assistant Professor
Department of Chemistry
L.B.S Govt. College
Kotputli (Raj.)**

REFERENCES

1. Varjani SJ, et al. Critical review on bio surfactant analysis, purification and characterization using rhamnolipid as a model biosurfactant. *Bioresour Technol.* 2017;232:389-397.
2. Owa FW, et al. Water pollution: sources, effects, control and management. *Int Lett Nat Sci.* 2014;3:1-6.
3. Olmstead S, et al. Water Pollution Control in Developing Countries: Policy Instruments and Empirical Evidence. *Rev En Eco Pol.* 2021;15:261-280.
4. Liyanage CP, et al. Impact of population growth on the water quality of natural water bodies. *Sustainability.* 2017;9:1405.
5. Dwivedi S, et al. Ganga water pollution: a potential health threat to inhabitants of Ganga basin. *Env Int.* 2018;117:327-338
6. Bratby J, et al. Coagulation and flocculation in water and wastewater treatment. (3rd edition). IWA publishing, London, UK. 2016;1-525.
7. Lau YY, et al. Degradation of cationic and anionic dyes in coagulation–flocculation process using bi-functionalized silica hybrid with aluminum-ferric as auxiliary agent. *RSC Advances.* 2015;5:34206-34215.
8. Moghaddam SS, et al. Coagulation/flocculation process for dye removal using sludge from water treatment plant: optimization through response surface methodology. *J Haz Mat.* 2010;175:651-657.
9. Silva GC, et al. A facile synthesis of Mn₃O₄/Fe₃O₄ super paramagnetic nanocomposites by chemical precipitation: Characterization and application in dye degradation. *Mat Res Bull.* 2014;49:544-551.
10. Chen Q, et al. A novel photocatalytic membrane decorated with RGO-Ag-TiO₂ for dye degradation and oil–water emulsion separation. *J Chem Tech and Biotech.* 2018;93:761-775.
11. Zhu MX, et al. Removal of an anionic dye by adsorption/precipitation processes using

An Overview of the Impact of Water Pollution on Life, Future Aspects, and Solutions

Mali Ram Meena

alkaline white mud. J Haz Mat. 2007;149:735-741.

An Overview of the Impact of Water Pollution on Life, Future Aspects, and Solutions

Mali Ram Meena

22.11